


## BA-400



FLEXIBLE FLANGE 400°C/2H

Flexible flange used to be avoid vibrations in the installation.  
Certified according to the European standard EN 12101-3 400°C/2H.


## Fans




AA P/R



AA45/5-60/  
7



AA47-70



BC



BCI



BOX BSTB



BOX BSTB  
F400



BOX HBF  
F400



BOX HBFX  
(F400+ATE  
X)



BOX RL



BOX RLF  
F400



HBF F400



HBFX  
(F400+ATE  
X)



HC



HCA



HH



HHP



HM



HMF F400  
2P



HMF F400  
DUAL




HMFX  
(F400+ATE  
X)

## Technical data

Code	Model
960002066	BA-400 20
960002051	BA-400 25
960002053	BA-400 35
960002054	BA-400 40
960002055	BA-400 45
960002064	BA-400 50
960002056	BA-400 56
960002057	BA-400 63
960002058	BA-400 71
960002059	BA-400 80
960002061	BA-400 90
960002062	BA-400 100
960002068	BA-400 10/12
960002067	BA-400 15/16
960002052	BA-400 30/31
960002063	BA-400 112/125

## Dimensions

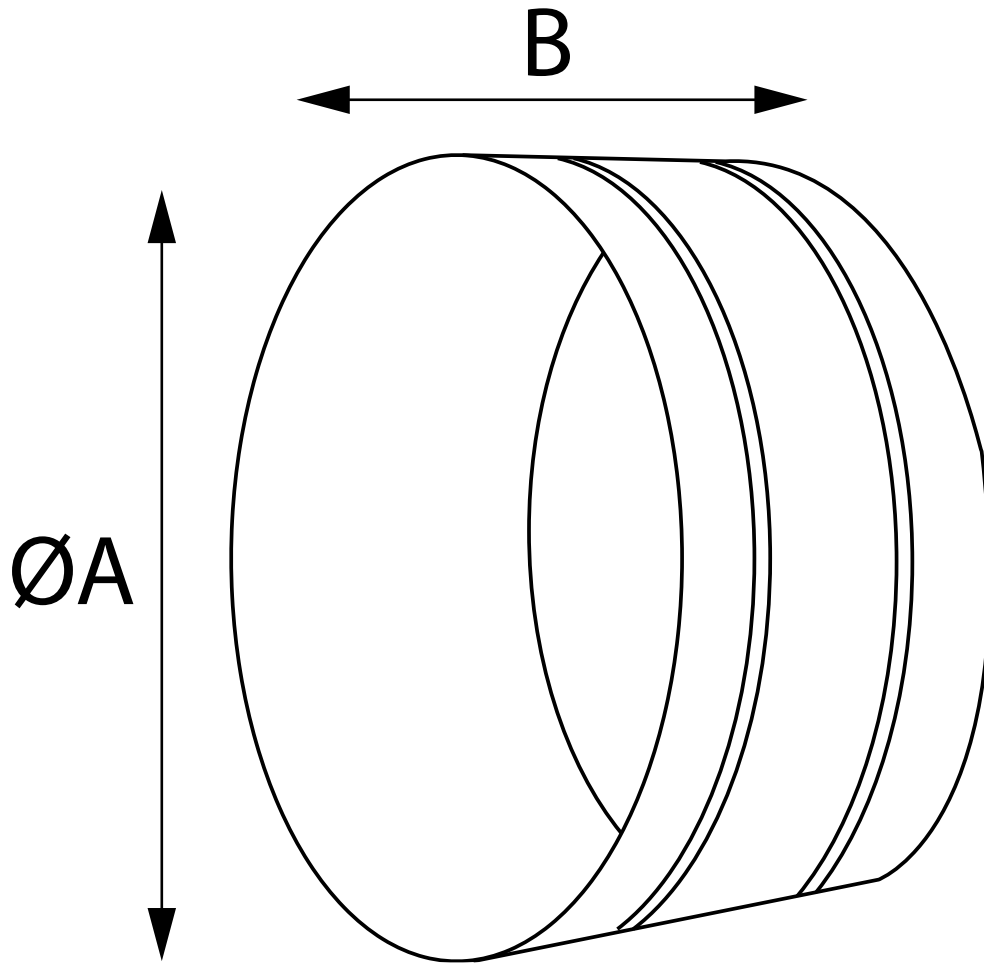

Model	B	ØA
BA-400 20	160	200
BA-400 25	160	250
BA-400 35	160	355
BA-400 40	160	400
BA-400 45	160	460
BA-400 50	160	510
BA-400 56	160	570
BA-400 63	160	630
BA-400 71	160	710
BA-400 80	160	810
BA-400 90	160	910
BA-400 100	160	1010
BA-400 10/12	160	125

Model	B	ØA
BA-400 15/16	160	160
BA-400 30/31	160	315
BA-400 112/125	160	1250