

BD



**FAN DOUBLE INLET**

**MANUFACTURING FEATURES:**

- Galvanised steel sheet housing.
- Double inlet forward curved impeller in all models. Turbine fiber reinforced glass sizes 7-7, 9-9, 10/10 and 12/12. Other models in galvanized sheet.
- Supplied with mounting feet (included in price).
- Exclusive system Casals fixing motor and turbine fan by flexible arms silent blocks to avoid any vibration. Arms in compliance with ROHS regulations 2002/95 / EC (Restriction of Hazardous Substances in electrical and electronic equipment)
- Closed motors specially designed Casals: extruded aluminum housing, all protected inside the terminal box, built-in motor with IP65 connections.
- Motor with IP55 protection and Class F insulation standard voltages: 230V 50Hz in single phase and 230/400V 50Hz three-phase.
- Single phase voltage controllable. Adjustable phase models suitable for inverter.

**APPLICATIONS:**

- Designed for assembly in equipment:
- Ventilation boxes and air handling units.
  - Centrifugal heaters.
  - Industrial and professional kitchen hoods.
  - Maximum working temperature: 50°C.

**UNDER REQUEST**

- Impeller made of galvanized steel sheet.
- assembled

**Accessories**



INT



MBI



RA



REG



REG VMC



REGD-1



RI



RM



S



SFC

## Technical data

### Single-phase motor / 4 poles

Code	Model	R.P.M.	Rated I. (A) 230V	Rated power kW	Max. Airflow m3/h	Sound db (A)*	Weight	Connect. diagram
251100260	BD 7/7 M4 0,12kW	1370	1,5	0,12	1.820	53	9	1
251100261	BD 7/7 M4 0,13kW	1370	1,55	0,13	1.940	58	9	1
251270260	BD 9/7 M4 0,35kW	1375	2,7	0,35	2.540	59	15	1
251220260	BD 9/9 M4 0,35kW	1375	2,7	0,35	2.810	60	12	1
251340260	BD 10/8 M4 0,59kW	1340	4,5	0,59	3.440	62	22	1
251320260	BD 10/10 M4 0,59kW	1340	4,5	0,59	3.780	63	22	1

### Single-phase motor / 6 poles


Code	Model	R.P.M.	Rated I. (A) 230V	Rated power kW	Max. Airflow m3/h	Sound db (A)*	Weight	Connect. diagram
251160260	BD 7/7 M6 0,04kW	885	0,6	0,04	1.080	43	9	1
251260260	BD 9/7 M6 0,12kW	925	1,2	0,12	1.900	49	14	1
251260261	BD 9/7 M6 0,13kW	940	1,3	0,13	2.050	49	14	1
251280260	BD 9/9 M6 0,12kW	925	1,2	0,12	2.160	53	15	1
251280261	BD 9/9 M6 0,13kW	940	1,3	0,13	2.240	52	15	1
251330260	BD 10/8 M6 0,19kW	880	2,1	0,19	2.650	56	17	1
251330261	BD 10/8 M6 0,21kW	945	2,1	0,21	2.625	55	17	1
251370260	BD 10/10 M6 0,19kW	880	2,1	0,19	3.020	59	15,50	1
251370261	BD 10/10 M6 0,21kW	945	2,1	0,21	2.860	56	15,50	1
251600261	BD 12/9 M6 0,76kW	950	6,7	0,76	5.860	58	21	1
251600260	BD 12/9 M6 0,79kW	945	6,2	0,79	5.980	63	21	1
251520261	BD 12/12 M6 0,76kW	950	6,7	0,76	6.275	59	27	1
251520260	BD 12/12 M6 0,79kW	945	6,2	0,79	6.530	66	27	1

### Three-phase motor / 6 poles

Code	Model	R.P.M.	Rated I. (A) 400V	Rated power kW	Max. Airflow m3/h	Sound db (A)*	Weight	Connect. diagram
251600161	BD 12/9 T6 1,1kW	945	3,78	1,10	6.200	58	26	2
251520160	BD 12/12 T6 1,1kW	945	3,78	1,10	6.940	58	27	2

**Notes:**  
 \* Total sound pressure level at the point of maximum flow measured in dB(A) in the suction measured in free field at a distance of 6m from the source

### Dimensions

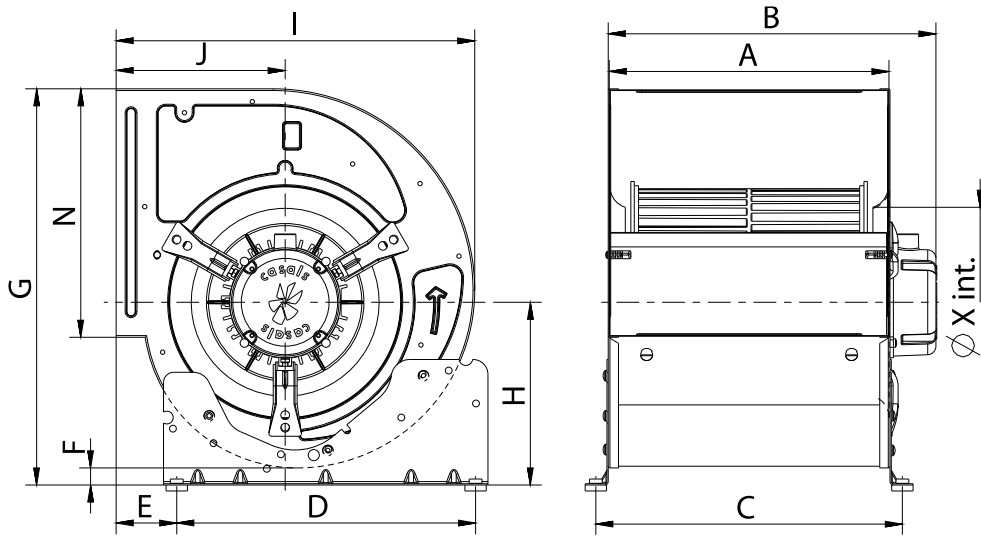

Model	A	B m <sup>ax</sup>	C	D	E	F	G	H	I
BD 7/7 M4 0,12kW	230	302	259	245	48,5	9,5	337	150	316
BD 7/7 M4 0,13kW	230	302	259	245	48,5	9,5	337	150	316
BD 7/7 M6 0,04kW	230	277	259	245	48,5	9,5	337	150	316
BD 9/7 M4 0,35kW	233	287	262	245	70	19	407	191	376
BD 9/7 M6 0,12kW	233	284	262	245	70	19	407	191	376
BD 9/7 M6 0,13kW	233	284	262	245	70	19	407	191	376
BD 9/9 M4 0,35kW	301	354,5	330	245	70	19	407	191	376
BD 9/9 M6 0,12kW	301	352	330	245	70	19	407	191	376
BD 9/9 M6 0,13kW	301	352	330	245	70	19	407	191	376
BD 10/8 M4 0,59kW	265	339	294	350	70,5	20	464	214	420
BD 10/8 M6 0,19kW	265	333	294	350	70,5	20	464	214	420
BD 10/8 M6 0,21kW	265	333	294	350	70,5	20	464	214	420
BD 10/10 M4 0,59kW	329	384	359	350	70,5	20	464	214	420
BD 10/10 M6 0,19kW	329	368	359	350	70,5	20	464	214	420
BD 10/10 M6 0,21kW	329	384	359	350	70,5	20	464	214	420
BD 12/9 M6 0,76kW	310	380	339	350	77	17	536	244	490
BD 12/9 M6 0,79kW	310	389	339	350	77	17	536	244	490
BD 12/9 T6 1,1kW	310	380	339	350	77	17	536	244	490
BD 12/12 M6 0,76kW	396	437	425	350	77	17	536	244	490
BD 12/12 M6 0,79kW	396	450	425	350	77	17	536	244	490
BD 12/12 T6 1,1kW	396	437	425	350	77	17	536	244	490

Model	J	N	X
BD 7/7 M4 0,12kW	153	208	158

Model	J	N	X
BD 7/7 M4 0,13kW	153	208	158
BD 7/7 M6 0,04kW	153	208	158
BD 9/7 M4 0,35kW	184	260	202
BD 9/7 M6 0,12kW	184	260	202
BD 9/7 M6 0,13kW	184	260	202
BD 9/9 M4 0,35kW	184	260	202
BD 9/9 M6 0,12kW	184	260	202
BD 9/9 M6 0,13kW	184	260	202
BD 10/8 M4 0,59kW	198	291	220
BD 10/8 M6 0,19kW	198	291	220
BD 10/8 M6 0,21kW	198	291	220
BD 10/10 M4 0,59kW	198	291	220
BD 10/10 M6 0,19kW	198	291	220
BD 10/10 M6 0,21kW	198	291	220
BD 12/9 M6 0,76kW	230	343,5	260
BD 12/9 M6 0,79kW	230	343,5	260
BD 12/9 T6 1,1kW	230	343,5	260
BD 12/12 M6 0,76kW	230	343,5	260
BD 12/12 M6 0,79kW	230	343,5	260
BD 12/12 T6 1,1kW	230	343,5	260

## Wiring diagram

DIAGRAM Nº 1

**SINGLE PHASE MOTOR  
MOTOR MONOFÁSICO**


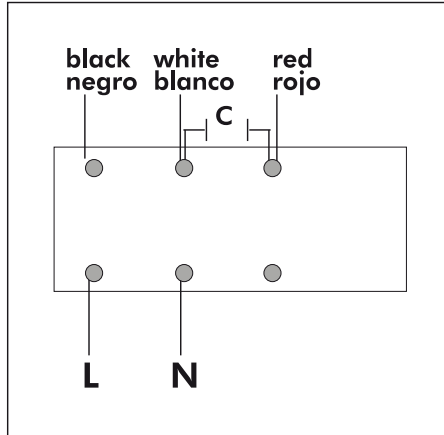



DIAGRAM Nº 2

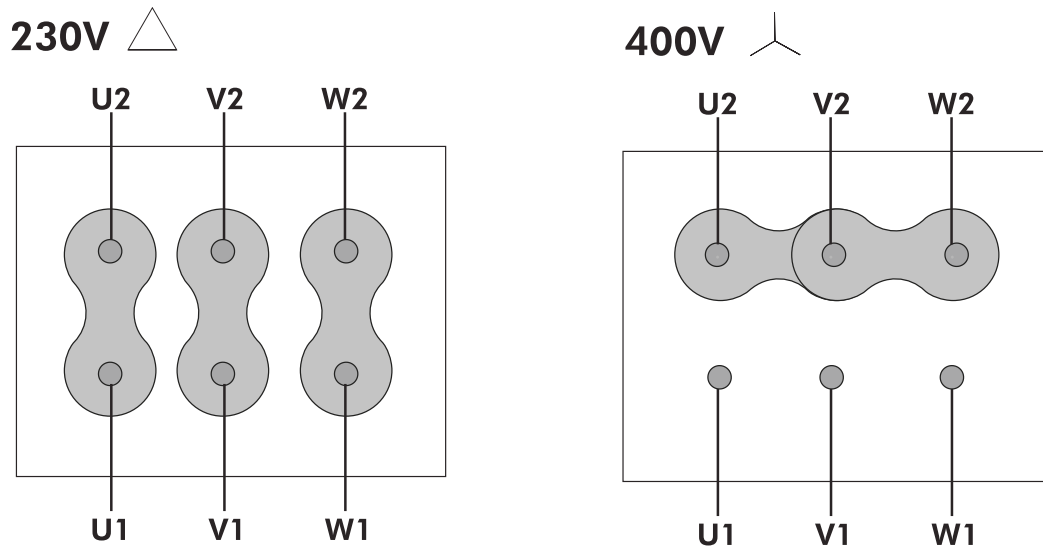


# CHARACTERISTIC CURVE

1	BD 7/7 M4 0,12kW	2	BD 7/7 M4 0,13kW	3	BD 9/7 M4 0,35kW	4	BD 9/9 M4 0,35kW
5	BD 10/8 M4 0,59kW	6	BD 10/10 M4 0,59kW				

## AIR FLOW - PRESSURE

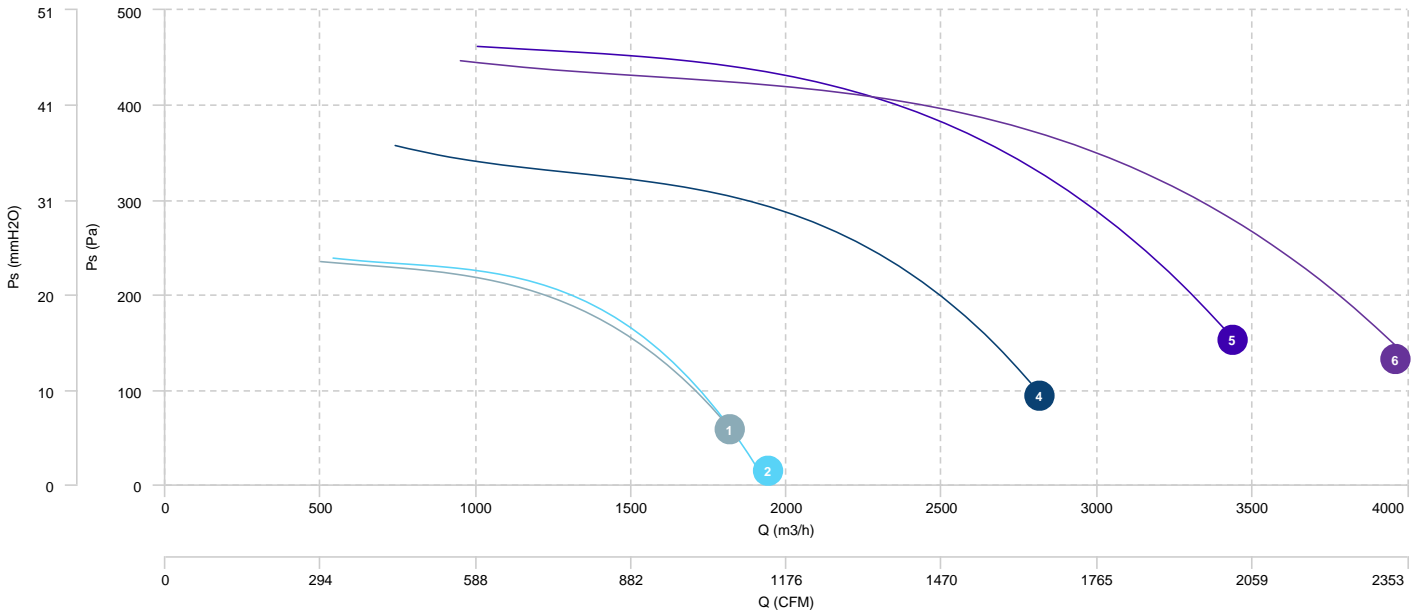


## AIR FLOW - ABSORBED POWER

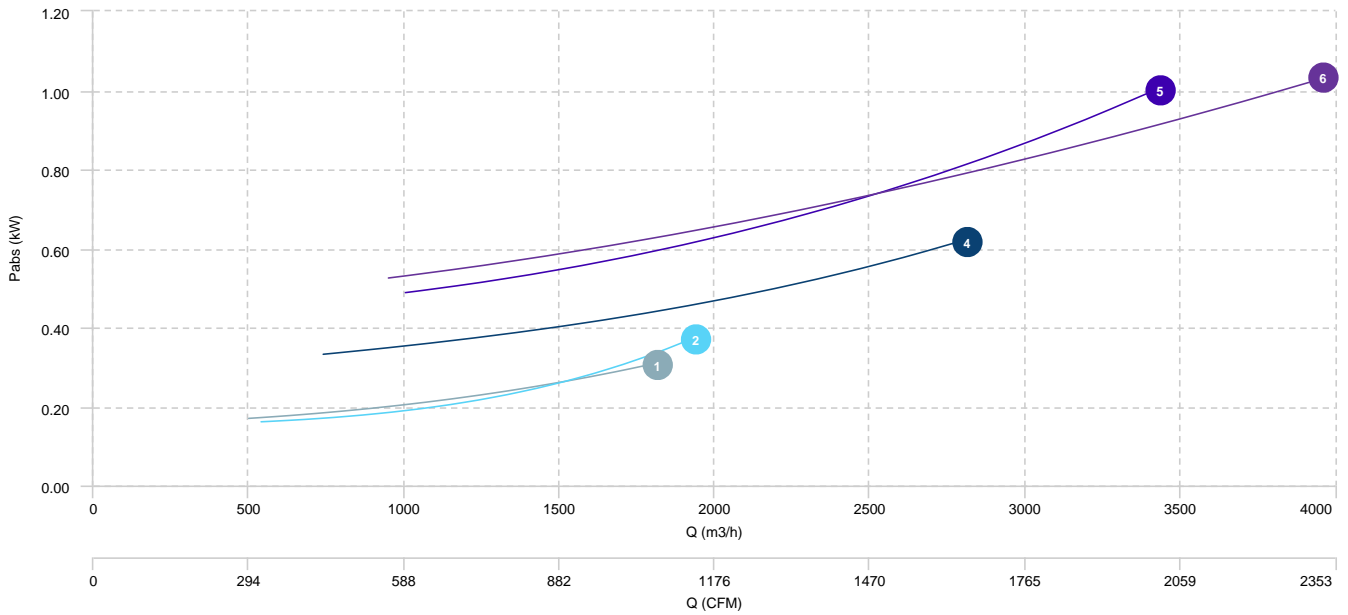


1	BD 7/7 M6 0,04kW	2	BD 9/7 M6 0,12kW	3	BD 9/7 M6 0,13kW	4	BD 9/9 M6 0,12kW
5	BD 9/9 M6 0,13kW	6	BD 10/8 M6 0,19kW	7	BD 10/8 M6 0,21kW		

## AIR FLOW - PRESSURE

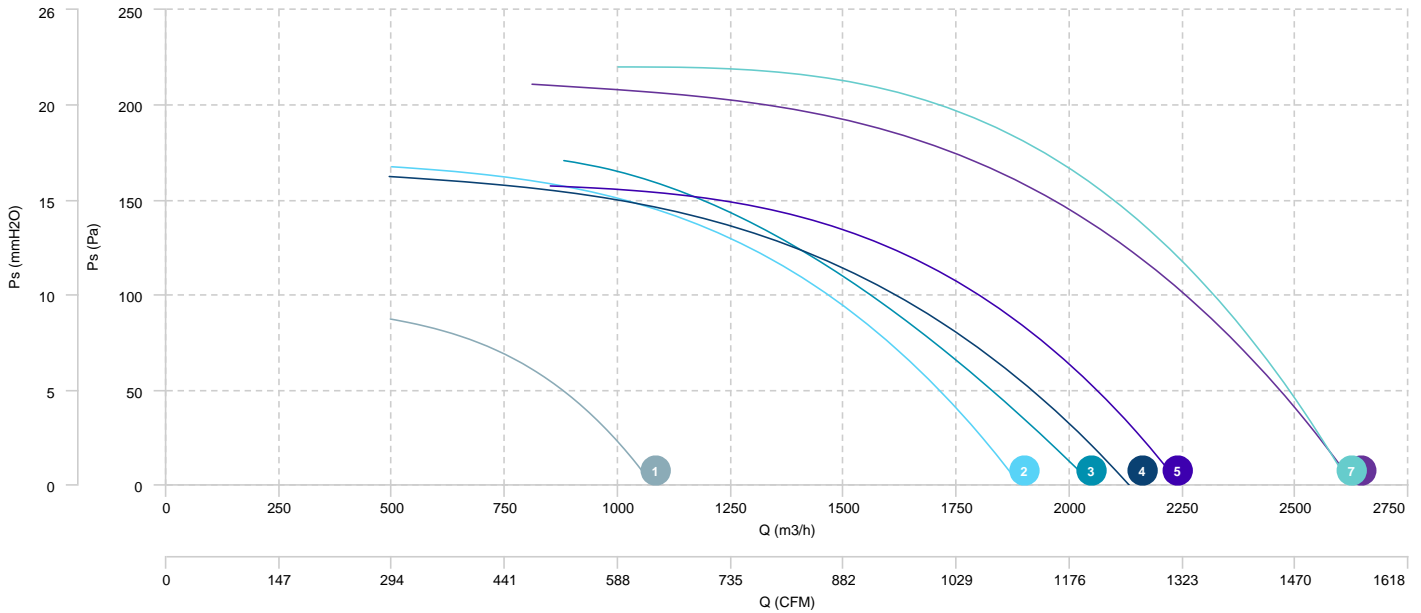


## AIR FLOW - ABSORBED POWER

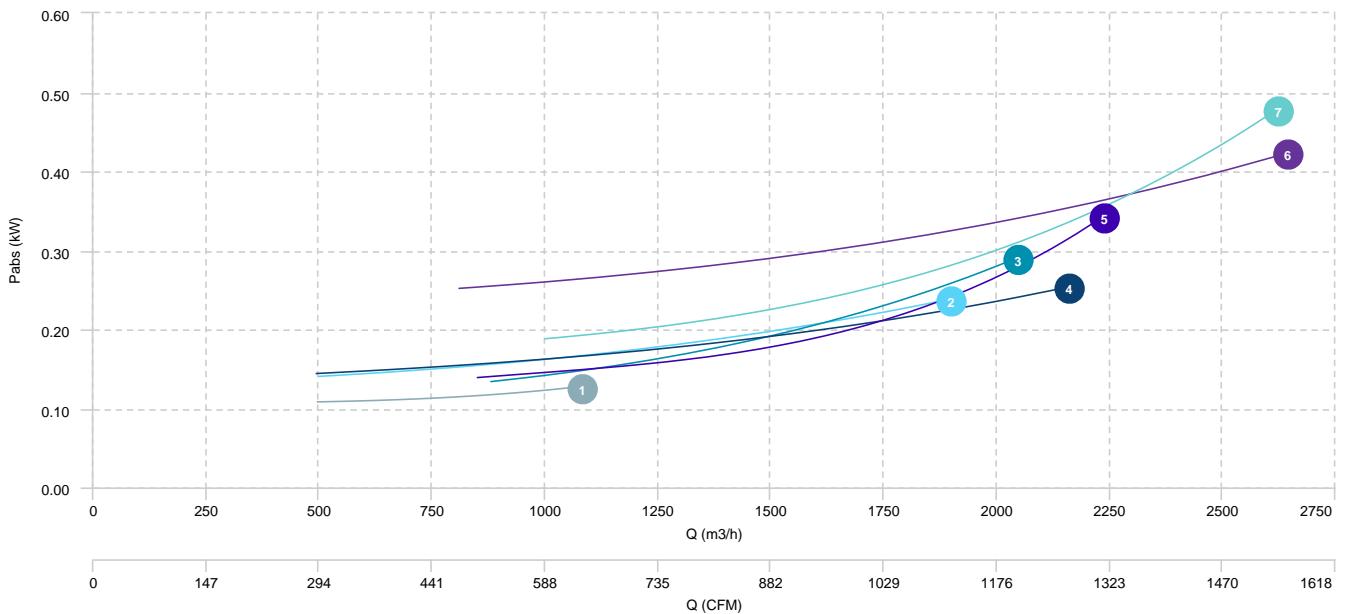


1	BD 10/10 M6 0,19kW	2	BD 10/10 M6 0,21kW	3	BD 12/9 M6 0,76kW	4	BD 12/9 M6 0,79kW
5	BD 12/12 M6 0,76kW	6	BD 12/12 M6 0,79kW				

## AIR FLOW - PRESSURE

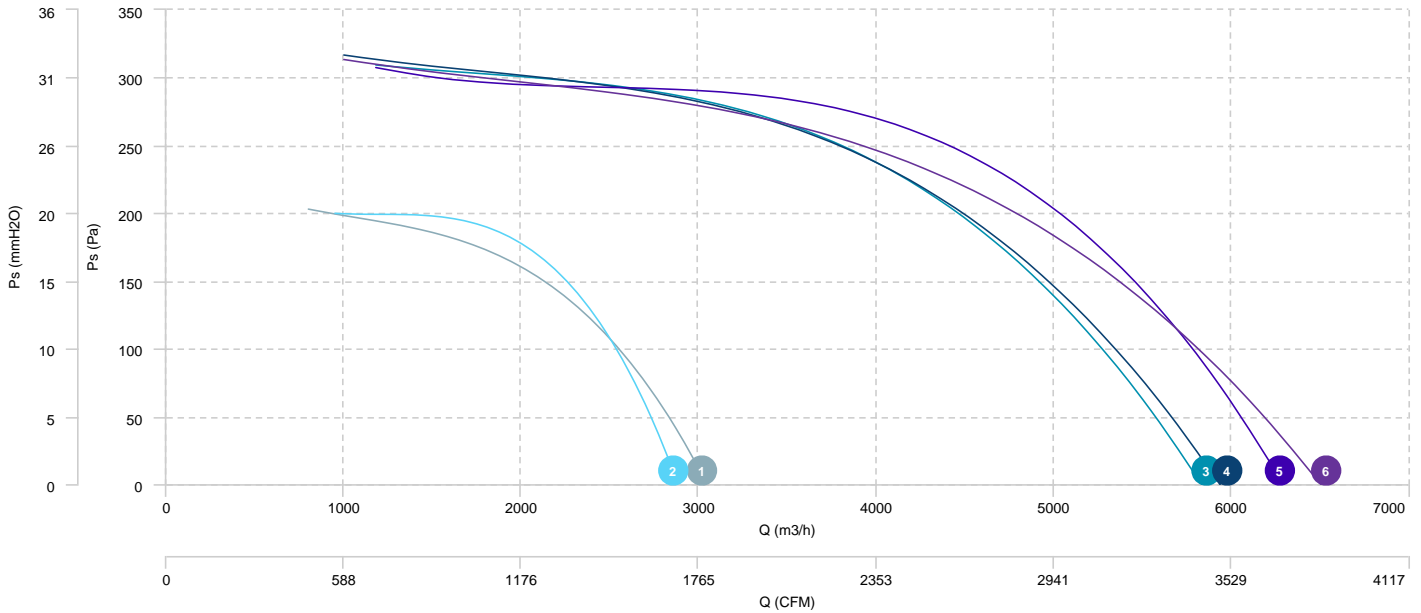

## AIR FLOW - ABSORBED POWER

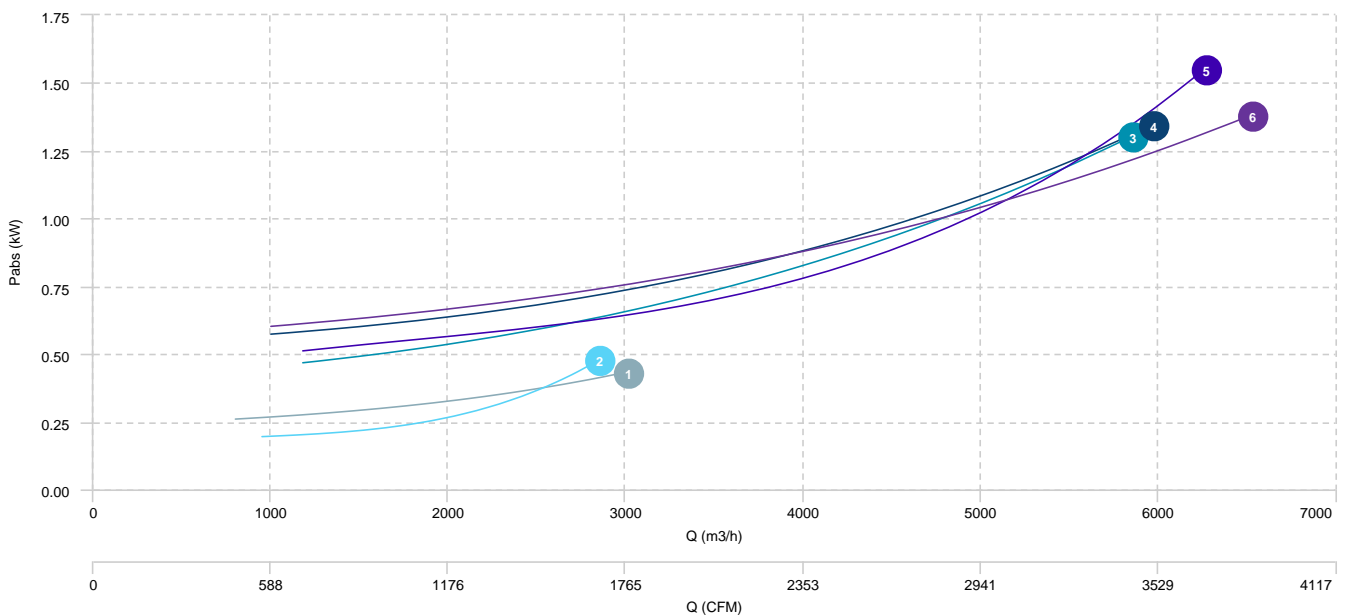





1 BD 12/9 T6 1,1kW

2 BD 12/12 T6 1,1kW

## AIR FLOW - PRESSURE

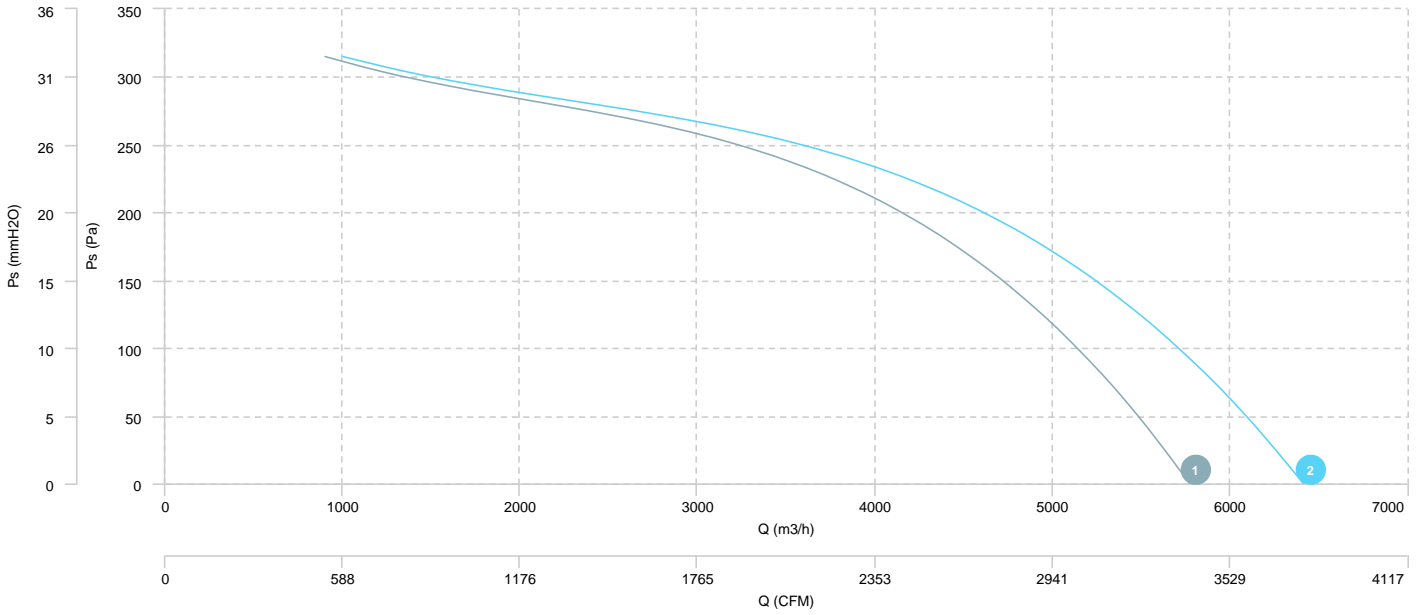

## AIR FLOW - ABSORBED POWER

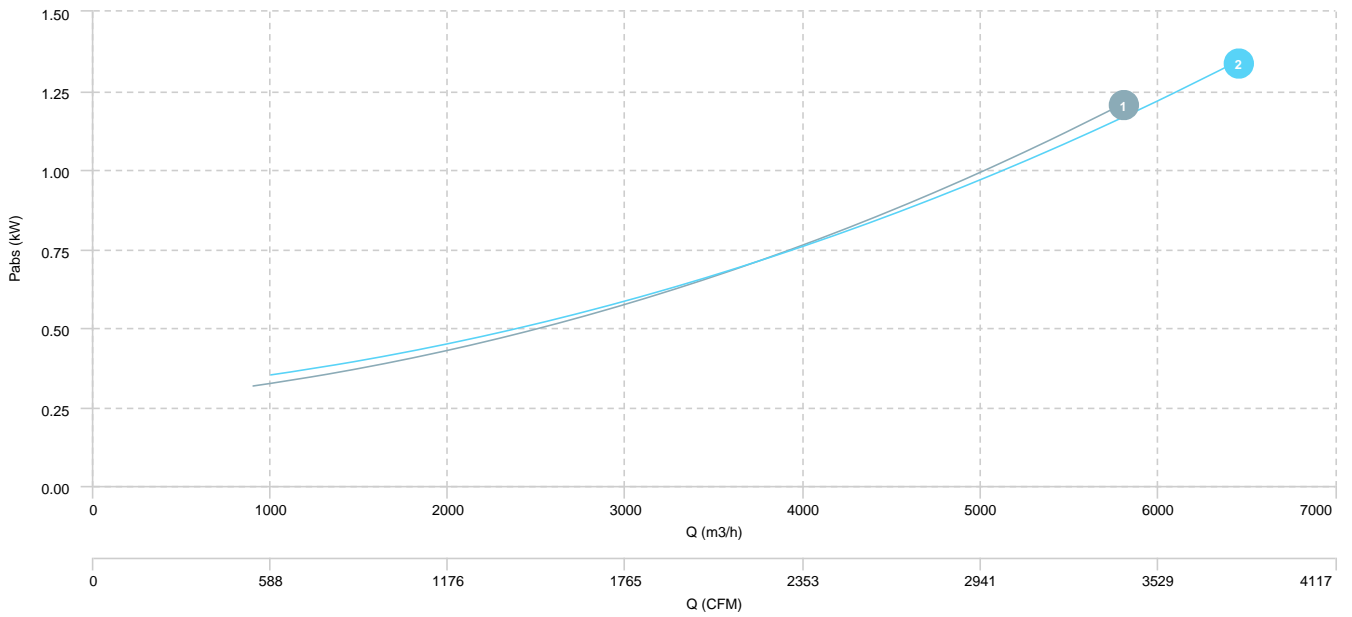

## Sound data

### Sound / 4 poles

		Sound power Lw dB (A)								
Model		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Total
BD 7/7 M4 0,12kW	Inlet	58	60	68	70	74	74	69	60	79
BD 7/7 M4 0,13kW	Inlet	63	65	74	76	80	79	75	65	84
BD 9/7 M4 0,35kW	Inlet	64	66	75	77	81	80	76	66	85
BD 9/9 M4 0,35kW	Inlet	65	67	76	78	82	81	77	67	86
BD 10/8 M4 0,59kW	Inlet	67	69	78	80	84	83	79	69	88
BD 10/10 M4 0,59kW	Inlet	68	70	79	81	85	84	80	70	89

### Sound / 6 poles

		Sound power Lw dB (A)								
Model		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Total
BD 7/7 M6 0,04kW	Inlet	48	50	59	61	65	64	60	50	69
BD 9/7 M6 0,12kW	Inlet	54	56	64	66	70	69	65	56	75
BD 9/7 M6 0,13kW	Inlet	54	56	65	67	71	70	66	56	75
BD 9/9 M6 0,12kW	Inlet	58	60	68	70	74	73	69	60	79
BD 9/9 M6 0,13kW	Inlet	57	59	68	70	74	73	69	59	78
BD 10/8 M6 0,19kW	Inlet	61	63	72	74	78	77	73	63	82
BD 10/8 M6 0,21kW	Inlet	60	62	71	73	77	76	72	62	81
BD 10/10 M6 0,19kW	Inlet	64	66	74	76	80	79	75	66	85
BD 10/10 M6 0,21kW	Inlet	61	63	72	73	77	77	72	63	82
BD 12/9 M6 0,76kW	Inlet	63	65	74	76	80	79	75	65	84
BD 12/9 M6 0,79kW	Inlet	68	70	78	80	84	83	79	70	89
BD 12/9 T6 1,1kW	Inlet	63	65	74	76	80	79	75	65	84
BD 12/12 M6 0,76kW	Inlet	64	66	75	76	80	80	75	66	85
BD 12/12 M6 0,79kW	Inlet	71	73	81	83	87	86	82	73	92
BD 12/12 T6 1,1kW	Inlet	63	65	74	76	80	79	75	65	84

## erp data

ERP	
Fan type	Centrifugal fan radial or forward blades
Installation category	A
Efficiency category	Static
The fan has to be installed with FSC	No

### ERP / 4 poles

Model	Motor power (kW)	Maximum efficiency point data						
		Max. efficiency (%)	Efficiency grade (N) (N)	Air Flow (m3/h)	Ps (Pa)	Pabs (kW)	speed (rpm)	Specific ratio
BD 7/7 M4 0,12kW	0,12	27,47	38,15	998,80	218,31	0,20	1370	1,00
BD 7/7 M4 0,13kW	0,13	33,70	44,44	1.104,78	219,73	0,20	1370	1,00
BD 9/9 M4 0,35kW	0,35	35,49	44,08	1.790,28	305,88	0,44	1375	1,00
BD 10/8 M4 0,59kW	0,59	38,80	46,35	2.064,92	426,79	0,64	1340	1,00
BD 10/10 M4 0,59kW	0,59	38,41	45,62	2.454,37	399,11	0,73	1340	1,00

### ERP / 6 poles

Model	Motor power (kW)	Maximum efficiency point data						
		Max. efficiency (%)	Efficiency grade (N) (N)	Air Flow (m3/h)	Ps (Pa)	Pabs (kW)	speed (rpm)	Specific ratio
BD 9/7 M6 0,12kW	0,12	26,44	37,68	1.080,36	145,17	0,17	925	1,00
BD 9/7 M6 0,13kW	0,13	32,72	44,38	1.012,63	164,08	0,14	940	1,00
BD 9/9 M6 0,12kW	0,12	27,46	38,59	1.219,44	138,19	0,17	925	1,00
BD 9/9 M6 0,13kW	0,13	32,64	44,03	1.243,12	149,05	0,16	940	1,00
BD 10/8 M6 0,19kW	0,19	28,16	37,84	1.555,88	189,01	0,29	880	1,00
BD 10/8 M6 0,21kW	0,21	38,67	49,11	1.481,15	213,49	0,22	945	1,00
BD 10/10 M6 0,19kW	0,19	28,05	37,60	1.754,04	175,36	0,31	880	1,00
BD 10/10 M6 0,21kW	0,21	38,43	48,75	1.713,03	193,37	0,23	945	1,00
BD 12/9 M6 0,76kW	0,76	36,56	44,03	3.017,27	283,33	0,66	950	1,00
BD 12/9 M6 0,79kW	0,79	32,64	39,71	3.217,87	275,50	0,76	945	1,00
BD 12/9 T6 1,1kW	1,1	38,25	46,39	2.633,77	268,82	0,52	945	1,00
BD 12/12 M6 0,76kW	0,76	38,72	46,03	3.479,52	284,56	0,70	950	1,00
BD 12/12 M6 0,79kW	0,79	32,33	39,23	3.508,27	265,51	0,81	945	1,00
BD 12/12 T6 1,1kW	1,1	39,15	47,06	2.847,62	270,66	0,56	945	1,00